

**DEVELOP**

Dynamic balance


[www.develop.eu](http://www.develop.eu)




# ineo 754e



- > Black & white  
A3 multifunctional
- > Up to 75 ppm

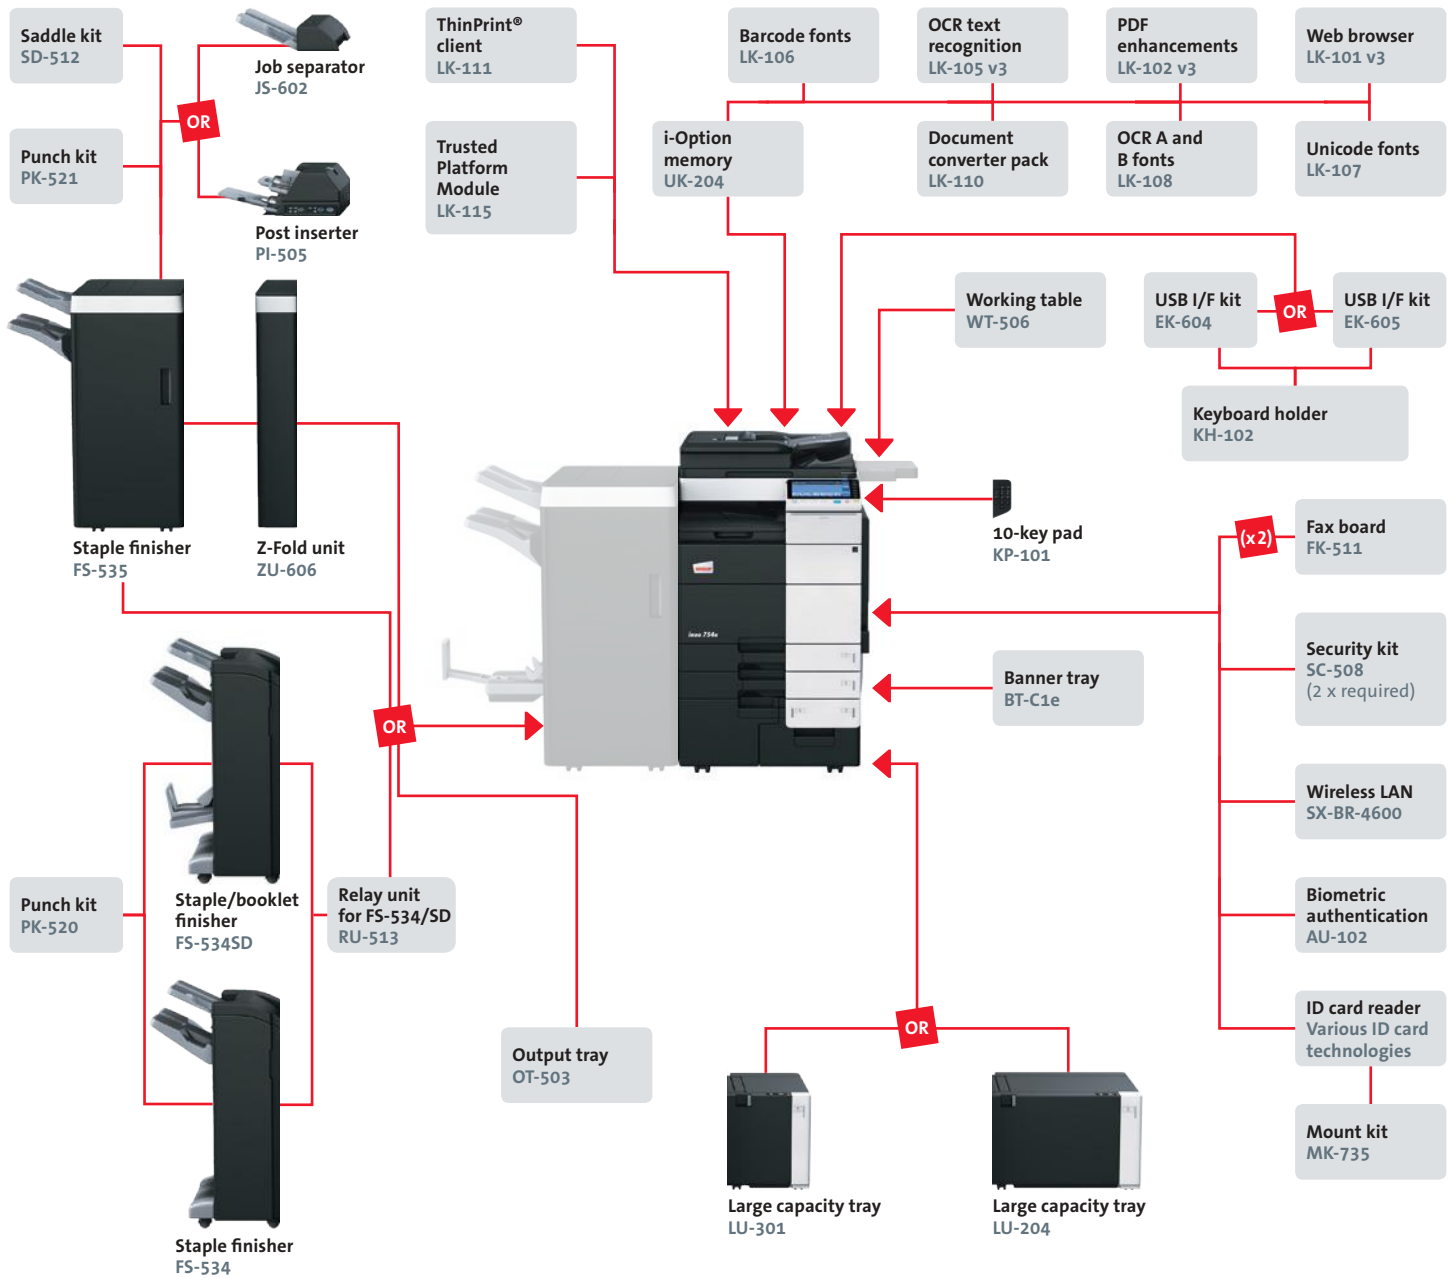

Finishing functionalities

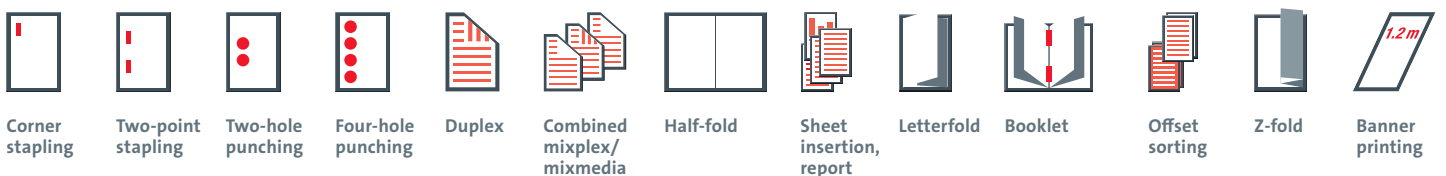

## ineo 754e

A3 multifunctional with 75 ppm b/w. Standard ineo controller with PCL 6, PCL 5, PostScript 3, PDF 1.7, XPS and OOXML support. Paper capacity of 500 + 500 + 1,000 + 1,500 sheets and 150-sheet manual bypass. Media from A6 to SRA3, 1.2 m banner and 52–300 g/m<sup>2</sup>. 2 GB memory, 250 GB hard disk and Gigabit Ethernet standard.

<b>LU-204 Large capacity tray</b>	A4–SRA3, 2,500 sheets, 52–256 g/m <sup>2</sup>
<b>LU-301 Large capacity tray</b>	A4, 3,000 sheets, 52–256 g/m <sup>2</sup>
<b>FS-534 Staple finisher</b>	50-sheet stapling, 3,200 sheets max. output
<b>FS-534SD Booklet finisher</b>	50-sheets staple finisher, 20-sheets booklet finisher, 2,200 sheets max. output
<b>RU-513 Relay unit for FS-534/SD</b>	For FS-534/SD installation
<b>PK-520 Punch kit for FS-534/SD</b>	2/4 hole punching, autoswitching
<b>FS-535 Staple finisher</b>	100 sheets stapling, 3,200 sheets max. output
<b>PK-521 Punch kit for FS-535</b>	2/4 hole punching, autoswitching
<b>SD-512 Saddle kit for FS-535</b>	Booklet finishing, half-fold, letter-fold
<b>PI-505 Post inserter for FS-535</b>	Cover insertion, post finishing
<b>JS-602 Job separator for FS-535</b>	Separation of fax output, etc.
<b>ZU-606 Z-fold unit for FS-535</b>	Z-fold for A3 prints, 2/4 hole punching
<b>OT-503 Output tray</b>	Output tray used instead of finisher
<b>KP-101 10-Key pad</b>	For use instead of touchscreen

<b>WT-506 Working table</b>	Authentication device placement
<b>FK-511 Fax board</b>	Super G3 fax, digital fax functionality
<b>KH-102 Keyboard holder</b>	To place USB keyboard
<b>EK-604 USB I/F kit</b>	USB keyboard connection
<b>EK-605 USB I/F kit</b>	USB keyboard connection, Bluetooth
<b>ID card reader</b>	Various ID card technologies
<b>MK-735 Mount kit</b>	Installation kit for ID card reader
<b>AU-102</b>	Finger vein scanner
<b>Biometric authentication</b>	
<b>SC-508 Security kit</b>	Copy guard function
<b>BT-C1e Banner tray</b>	Multi-page banner feeding
<b>LK-101v3 Web browser</b>	Web browser and IWS
<b>LK-102v3 PDF enhancements</b>	PDF/A, PDF encryption, digital signature
<b>LK-105v3</b>	Searchable PDF and PPTX
<b>OCR text recognition</b>	
<b>LK-106 Barcode fonts</b>	Supports native barcode printing
<b>LK-107 Unicode fonts</b>	Supports native Unicode printing
<b>LK-108 OCR A and B fonts</b>	Supports native OCR A and B font printing
<b>LK-110</b>	Generates various file formats incl. DOCX, XLSX and PDF/A
<b>Document converter pack</b>	
<b>LK-111 ThinPrint® Client</b>	Print data compression for reduced network impact
<b>LK-115 TPM activation</b>	Trusted Platform Module for protection of data encryption and decryption
<b>UK-204 i-Option memory</b>	Memory extension for i-Options
<b>SX-BR-4600 Wireless LAN</b>	Wireless LAN to network connector

## Technical specifications

## SYSTEM SPECIFICATIONS

<b>System memory</b>	2,048 MB
<b>System hard disk</b>	250 GB
<b>Interface</b>	10-Base-T/100-Base-T/1,000-Base-T Ethernet; USB 2.0; Wi-Fi 802.11b/g (optional)
<b>Network protocols</b>	TCP/IP (IPv4 / IPv6); IPX/SPX; NetBEUI; AppleTalk (EtherTalk); SMB; LPD; IPP; SNMP; HTTP
<b>Frame types</b>	Ethernet 802.2; Ethernet 802.3; Ethernet II; Ethernet SNAP
<b>Automatic document feeder</b>	Up to 150 originals; A6–A3; 35–210 g/m <sup>2</sup> ; Dual scan ADF
<b>Printable paper size</b>	A6–SRA3, customised paper sizes; banner paper max. 1,200 x 297 mm
<b>Printable paper weight</b>	52–300 g/m <sup>2</sup>
<b>Paper input capacity</b>	Standard: 3,650 sheets Max.: 6,650 sheets
<b>Tray 1</b>	500 sheets, A5–SRA3, 52–256 g/m <sup>2</sup>
<b>Tray 2</b>	500 sheets, A5–SRA3, 52–256 g/m <sup>2</sup>
<b>Tray 3</b>	1,500 sheets, A4, 52–256 g/m <sup>2</sup>
<b>Tray 4</b>	1,000 sheets, A4, 52–256 g/m <sup>2</sup>
<b>Large capacity tray</b>	3,000 sheets, A4, 52–256 g/m <sup>2</sup>
<b>LU-301 (optional)</b>	
<b>Large capacity tray</b>	2,500 sheets, A4-SRA3, 52–256 g/m <sup>2</sup>
<b>LU-204 (optional)</b>	
<b>Manual bypass</b>	150 sheets, A6-SRA3, custom sizes, banner, 52–300 g/m <sup>2</sup>
<b>Automatic duplexing</b>	A5–SRA3; 52–256 g/m <sup>2</sup>
<b>Finishing modes</b>	Offset; group; sort; staple; punch; post insertion; z-fold; (optional) centre-fold; letter fold; booklet
<b>Output capacity (with finisher)</b>	Max.: 3,300 sheets
<b>Output capacity (without finisher)</b>	Max.: 250 sheets
<b>Stapling</b>	Max.: 100 sheets or 94 sheets + 2 cover sheets (up to 209 g/m <sup>2</sup> )
<b>Stapling output capacity</b>	Max.: 1,000 sheets
<b>Letter fold</b>	Up to 3 sheets
<b>Letter fold capacity</b>	Max.: 30 sheets (tray); unlimited
<b>Booklet</b>	Max.: 20 sheets or 19 sheets + 1 cover sheet (up to 209 g/m <sup>2</sup> )

<b>Booklet output capacity</b>	Max.: 100 sheets (tray); unlimited
<b>Copy/print volume (monthly)</b>	Rec.: 80,000 pages; Max. <sup>(1)</sup> : 215,000 pages
<b>Toner lifetime</b>	48,960 pages
<b>Imaging unit lifetime</b>	300,000 pages/1,200,000 pages (Drum/Developer)
<b>Power consumption</b>	220–240 V / 50/60 Hz; less than 2.1 kW (system)
<b>System dimensions (W x D x H)</b>	650 x 799 x 1,155 mm
<b>System weight</b>	Approx. 201 kg

## COPIER SPECIFICATIONS

<b>Copying process</b>	Electrostatic laser copy, tandem, indirect
<b>Toner system</b>	HD polymerised toner
<b>Copy/print speed A4</b>	Up to 75 ppm
<b>Copy/print speed A3</b>	Up to 37 ppm
<b>Autoduplex speed A4</b>	Up to 75 ppm
<b>1st copy out time</b>	3.6 sec.
<b>Warm-up time</b>	Approx. 22 sec. <sup>(2)</sup>
<b>Copy resolution</b>	600 x 600 dpi
<b>Gradation</b>	256 gradations
<b>Multicopy</b>	1–9,999
<b>Original format</b>	A5–A3
<b>Magnification</b>	25–400% in 0.1% steps; auto-zooming
<b>Copy functions</b>	Chapter; cover and page insertion; proof copy (print and screen); adjustment test print; digital art functions; job setting memory; poster mode; image repeat; overlay (optional); stamping; copy protection

<sup>1</sup> If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed.

<sup>2</sup> Warm up time may vary depending on the operating environment and usage

PRINTER SPECIFICATIONS

<b>Print resolution</b>	1,800 x 600 dpi; 1,200 x 1,200 dpi
<b>Page description language</b>	PCL6 (XL 3.0); PCL 5; PostScript 3 (CPSI 3016); XPS
<b>Operating systems</b>	Windows Vista (32/64); Windows 7 (32/64); Windows 8 (32/64); Windows 10 (32/64); Windows Server 2008 (32/64); Windows Server 2008 R2, Windows Server 2012; Windows Server 2012 R2; Macintosh OS X 10.x; Unix; Linux; Citrix
<b>Printer fonts</b>	80 PCL Latin; 137 PostScript 3 Emulation Latin
<b>Print functions</b>	Direct print of PCL, PS, TIFF, XPS, PDF (v1.7), encrypted PDF files and OOXML (DOCX, XLSX, PPTX); mixmedia and mixplex; "Easy Set" job programming; overlay; watermark; copy protection; carbon copy print
<b>Mobile Printing</b>	AirPrint (iOS), Mopria (Android), Google Cloud Print (optional), ineoPRINT (iOS & Android)

SCANNER SPECIFICATIONS

<b>Scan speed</b>	Up to 180 ipm (mono/colour)
<b>Scan resolution</b>	Max.: 600 x 600 dpi
<b>Scan modes</b>	Scan-to-E-mail (Scan-to-Me), Scan-to-SMB (Scan-to-Home), Scan-to-FTP, Scan-to-Box, Scan-to-USB, Scan-to-WebDAV, Scan-to-DPWS, Network TWAIN scan
<b>File formats</b>	JPEG; TIFF; PDF; PDF/A 1a and 1b (optional); Compact PDF; encrypted PDF; searchable PDF (optional); XPS; compact XPS; PPTX and searchable PPTX (optional); searchable DOCX/XLSX (optional)
<b>Scan destinations</b>	2,100 (single + group); LDAP support
<b>Scan functions</b>	Annotation (text/time/date) for PDF; up to 400 job programs; realtime scan preview

FAX SPECIFICATION

<b>Fax standard</b>	Super G3 (optional)
<b>Fax transmission</b>	Analogue, i-Fax, Colour i-Fax (RFC3949-C), IP-Fax
<b>Fax resolution</b>	Max.: 600 x 600 dpi (ultra-fine)
<b>Fax compression</b>	MH; MR; MMR; JBIG
<b>Fax modem</b>	Up to 33.6 Kbps
<b>Fax destinations</b>	2,100 (single + group)
<b>Fax functions</b>	Polling; time shift; PC-Fax; receipt to confidential box; Receipt to E-mail/FTP/SMB; up to 400 job programs

USER BOX SPECIFICATIONS

<b>Max. storable documents</b>	Up to 3,000 documents or 10,000 pages
<b>Type of user boxes</b>	Public; Personal (with password or authentication); Group (with authentication)
<b>Type of system boxes</b>	Secure print; Encrypted PDF print; Fax receipt; Fax polling
<b>User box functionality</b>	Reprint; Combination; Download; Sending (E-mail/FTP/SMB and fax); Copy box to box

SYSTEM FEATURES

<b>Security</b>	ISO 15408/IEEE 2600.1; IP filtering and port blocking; SSL2; SSL3 and TLS1.0 network communication; IPsec support; IEEE 802.1x support; User authentication; Authentication log; Secure print; Hard disk overwrite (8 standard types); Hard disk data encryption (AES 256); Memory data auto deletion; Confidential fax receipt; Print user data encryption; copy protection (Copy Guard, Password Copy) optional
<b>Accounting</b>	Up to 1,000 user accounts; Active Directory support (user name + password + E-mail + smb folder); User function access definition; Biometric authentication (finger vein scanner) optional; ID card authentication (ID card reader) optional
<b>Software</b>	store+find (opt.), convert+share (opt.), Personal Applications (opt.), Enterprise Device Manager, Enterprise Account Manager (opt.), Enterprise Authentication Manager (opt.), Enterprise My Panel Manager (opt.), Enterprise My Print Manager (opt.), Data Administrator (user accounts & cost centres), Card solutions (opt.), jobticket (opt.), Unix/Linux support, SAP support



DEVELOP

Konica Minolta Business Solutions Europe GmbH  
 Europaallee 17 30855 Langenhagen Germany Phone +49 511 7404-0 www.develop.eu

For more information regarding the ineo 754e please refer to the respective product homepage



All data relating to the paper capacities of the document feeder, the final processing accessories and the paper cassettes apply to paper weighing 80 g/m<sup>2</sup> unless expressly stated otherwise. All data relating to the speed of printing, scanning or faxing apply to paper of an A4 format weighing 80 g/m<sup>2</sup> unless expressly stated otherwise.

All data relating to paper weights apply to media that are recommended by Konica Minolta. All technical data correspond to knowledge available at the time of going to print. Konica Minolta reserves the right to make technical alterations.

DEVELOP and ineo are registered trademarks/product titles owned by Konica Minolta Business Solutions Europe GmbH.

All other brand or product names are registered trademarks or product titles of their respective manufacturers. Konica Minolta does not accept any liability or guarantee for these products.

April 2016